
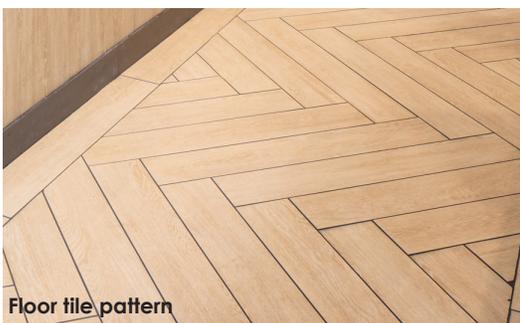


# ALPHABET

Quick tips and rules of thumb for installation of Alphabet decor



## CEILING

- 2x4 Acoustic ceiling tiles come pre-painted from supplier: **lead time is 4 weeks**
- Wood laminate accent soffit is provided by decor company
- Ensure there is adequate crew to install soffit due to size and weight (average size of soffit is 11'-6" x 11'-6")

## DECOR

- All furniture is to be bolted to the floor *with the exception of:*
  - Chairs without arms
  - Stools at the ends of booths
  - Stools at designated ADA seating areas
- Woodgrain benches are to be installed with a 3/4" gap between benches when placed side by side
- Ensure 7" metal connector is installed between woodgrain benches when benches are in a back to back configuration or along a halfwall
- Seat pads are available

## WALL FINISHES

- Wall panels and trim are purchased by the GC from the décor company and must account for a 4 week lead time. For additional install information contact your decor company.
- Black Schluter must be placed around the perimeter of the white tiled walls like a frame
- When white tiled walls wrap an inside corner, black Schluter is NOT to be placed in the inside corner edge
- Mixed grey wall tiles are to be installed in stacked pattern, random color placement (They are only used near the service area or restroom)
- White tiled walls to be installed in an offset pattern
- The floor tile pattern for the dining room and any play areas is to be herringbone. Perimeter of floor to have a tile border as shown in photo on the left.
- Wall tile at the service area is Eurowest Landstone Coal (This is unique to the Alphabet decor)

Global Development Contact:

Traci Maher

630.272.3483

traci.maher@us.mcd.com

